

Modelo: Legato® Sanitario de una pieza

FUNCIONES

- Alta eficiencia (1,28 GPF/4,8 LPF)
- Sistema de Tornado Flush®
- CEFIONTECT® El esmalte cerámico evita que la suciedad y el moho se adhieran a la cerámica.
- Especialmente diseñado para WASHLET®+
- Altura universal 43.5 cm
- Cumple con ADA

ESPECIFICACIONES PARA COLOMBIA

- Desagüe a 30.5 cm de pared terminada
- Se requiere: Kit Brida 40-AA-PB004. No incluido

COMPONENTES

- SS234#01 Incluye asiento caída suave. SoftClose®

COLORES/ACABADOS

- #01 Algodón

ESPECIFICACIÓN DEL PRODUCTO

Sanitario de una pieza con sistema Tornado Flush®. Altura universal. Alta eficiencia 1,28 GPF/4.8 LPF. Esmalte cerámico CEFIONTECT®. Incluye asiento caída suave SoftClose® y palanca cromada pulida.



TORNADO FLUSH



DISEÑO DE

FALDÓN



CEFIONTECT

CODES/STANDARDS

- Cumple ASME A112.19.2/CSA B45.1
- Certificaciones: IAPMO (CUPC), EPA Watersense, Estado de Massachusetts, Ciudad de Los Ángeles, y otros
- Cumplimiento del código: UPC, IPC, NSPC, NPC Canadá y otros
- Cumplimiento Legislativo: California AB715, California Green Building Code, Ordenanza de Eficiencia Del Agua de la Ciudad de Los Angeles
- Cumple con ADA (Manija instalada para fácil accionamiento)
- Cumple con los requisitos de advertencia de CA Prop 65



5-AA-MS624124CEFG#01

Modelo: Legato® Sanitario de una pieza


ESPECIFICACIONES GENERALES

Uso del agua	1.28 GPF (4.8 LPF)
Sistema de lavado	TORNADO FLUSH®
Presión mínima de agua	8 psi (Flujo)
Superficie de agua	7-3/4" x 9-3/8"
Diámetro de la trampa	2-1/8"
Desagüe a pared	30,5 cm
Sello de trampa	2-1/8"
Garantía	Garantía limitada de dos años por daño interno de fabricación
Material	Porcelana Vitrificada
Peso del envío	119 libras
Dimensiones de envío	32"L x 20"W x 17-3/4" H1 x 28-3/4" H2

NOTAS DE INSTALACIÓN


INSTALACIÓN ENFRENTADA

TOTO recomienda para instalaciones enfrentadas en construcciones verticales el uso del accesorio de la imagen 1.

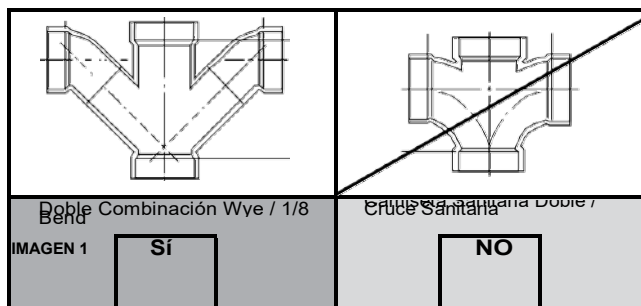

Para mantener un espacio de pared adecuado entre la parte posterior del tanque y la pared, instale la brida a una longitud nominal de 30,5 cm (distancia del desagüe)

DIMENSIONES

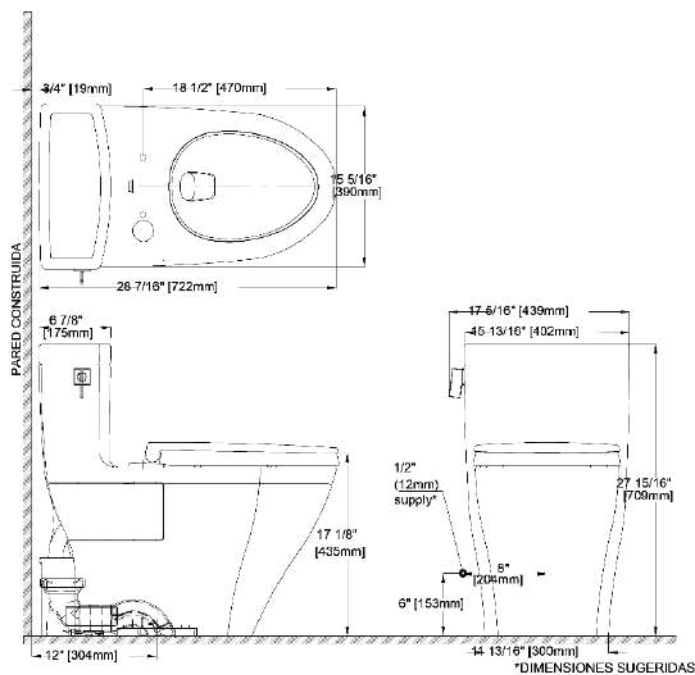

Legato® One-Piece High-Efficiency Toilet, 1.28GPF

FEATURES

- Tornado Flush® system, high-efficiency (1.28 GPF/4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate a WASHLET®+
- Skirted design
- Universal Height
- Elongated front bowl and seat
- 12" Rough-in
- Chrome plated trip lever

MODELS

- **MS624124CEFGA** (#01, #03, #11, #12)
With CEFIONTECT ceramic glaze, includes seat SS124, and Auto Flush
- **MS624124CEFG** (#01, #03, #11, #12)
Same as above but without Auto Flush
- **MS624124CEFG** (#51)
Without CEFIONTECT ceramic glaze & includes seat SS124

OPTIONAL COMPONENTS

- **SS234**
SoftClose Seat
- **TSU03W.10R**
10" Unifit Rough-In
- **TSU03W.14R**
14" Unifit Rough-In

COLORS/FINISHES

- | | |
|--|---|
| <ul style="list-style-type: none"> • #01 Cotton • #12 Sedona Beige | <p><u>Made to Order</u></p> <ul style="list-style-type: none"> • #03 Bone • #11 Colonial White • #51 Ebony
(Without CEFIONTECT) |
|--|---|

PRODUCT SPECIFICATION

The one-piece high-efficiency Tornado Flush system toilet shall be 1.28 GPF/4.8 LPF. Toilet shall be 12" Unifit rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MS624124CEF____.



Tornado Flush



Skirted Design



CEFIONTECT

CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



MS624124CEFG(A)

Legato® One-Piece High-Efficiency Toilet, 1.28GPF


SPECIFICATIONS

Water Use	1.28 GPF (4.8 LPF)
Flush System	Tornado Flush®
Min. Water Pressure	8 psi (Flowing)
Water Surface	7-3/4" x 9-3/8"
Trap Diameter	2-1/8"
Rough-in	12" (10" & 14" Optional)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	119 lbs
Shipping Dimensions	32" L x 20" W x 17-3/4" H¹ x 28-3/4" H²

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

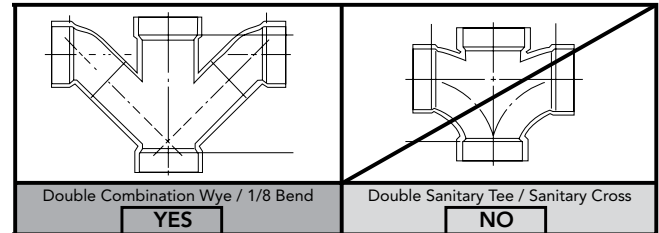

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

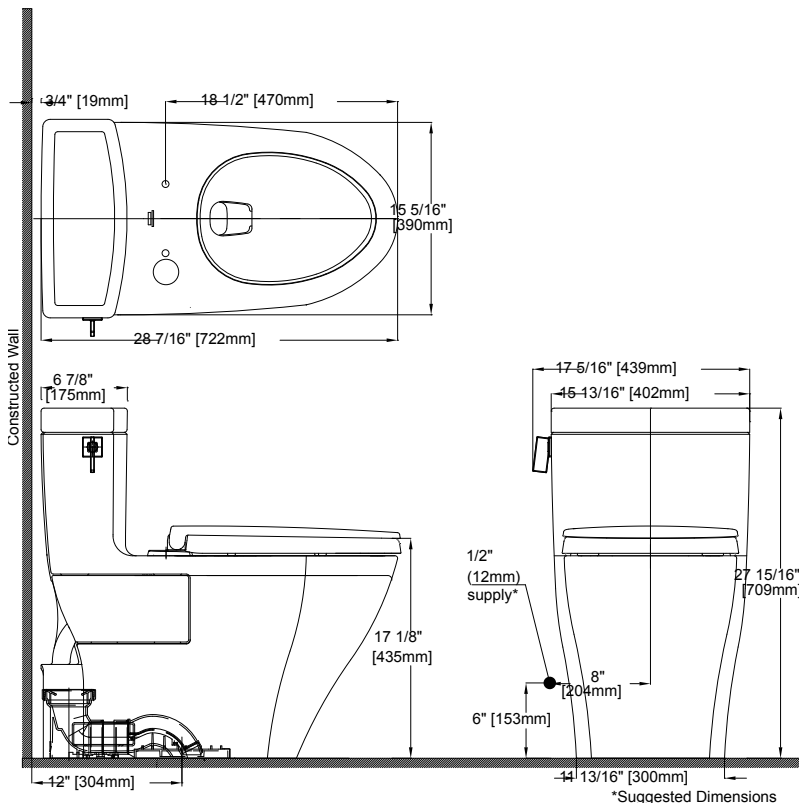

TOTO®

These dimensions and specifications are subject to change without notice