

Especificaciones

Descripción

- Consumo limitado a 1,5 gpm (5,7 L/min) máx. a 60 psi
- El sistema de extracción de manguera Reflex™ ofrece un funcionamiento suave, fácil movimiento y acoplamiento seguro
- Tecnología de pulverización Power Clean™ más fuerzas menos salpicaduras
- Sistema de conexión Duralock™ para una rápida instalación.
- Cabezal con Spray Pulldown y manguera trenzada de 68"
- Línea de alimentación flexibles en la caja de control y accesorios de compresión de ½"
- Grifo de arco alto que proporciona altura y alcance para llenar o limpiar pocetas grandes mientras que la varita de extracción proporciona la maniobrabilidad para la limpieza o enjuague
- Grifo giratorio de 360°
- Diseñado para que el mango se instale solo en el lado derecho

Cartucho

- 1255™ cartucho de Duralast™

Operación


- Mando de palanca
- Temperatura controlada por un arco de 100° de recorrido del mango
- Funciona con menos de 5 lbs. de fuerza
- Funciona en modo de flujo o pulverización en la posición de extracción o retraer

Estándares

- Certificados por terceros IAPMO Green, ASME A112.18.1/CSA B125.1 y todos los requisitos aplicables en el mismo incluyendo NSF 61/9G y 372
- Cumple con los requisitos de CalGreen y Georgia SB370
- Cumple con la Proposición 65 de California y con la Ley Federal de Agua Potable Segura
- El sistema de protección BackFlow que consiste en 2 válvulas antirretorno
- Cumple con ADA 

Garantía

- Garantía limitada de 2 años contra daños internos de fabricación.

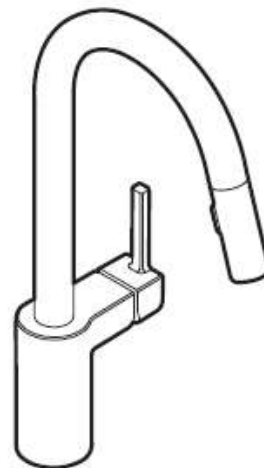

**Grifería lavaplatos
de arco alto. Modelo
ALIGN™**

Modelo: 30-AA-7565

NOTA: Este grifo está diseñado para ser instalado a través de 1 agujero, 1-1/4" mínimo de diámetro.




Tenga en cuenta la ficha técnica de la fábrica en inglés.



ACCESORIOS Y ACABADOS®

Especificaciones

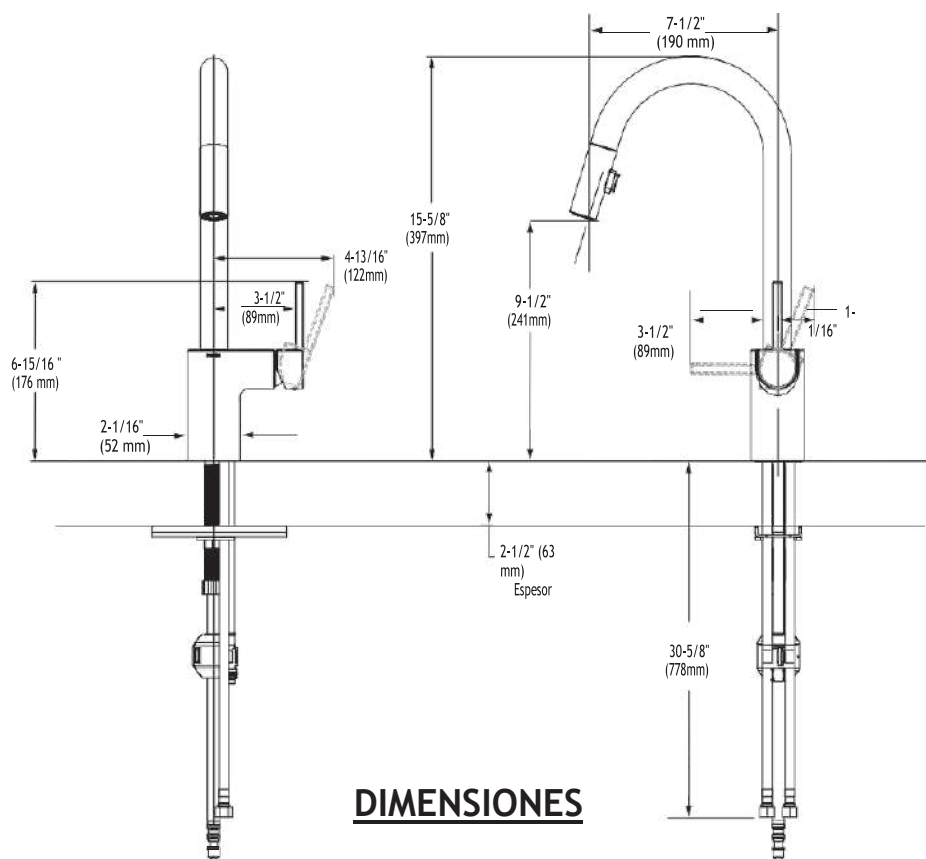

Tenga en cuenta la ficha técnica de la fábrica en inglés.


www.accesoriosyacabados.com
Serviaccesorios: 321 460 6501

MOEN



There is more than 1 version of this model.
Page down to identify the version you have.

Specifications

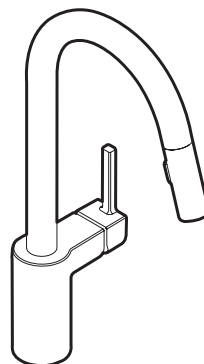

ALIGN™
Single Handle High Arc
Pulldown Kitchen Faucet

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED
THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.
(OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Power Clean™ spray technology
- Metal construction with various finishes identified by suffix
- Duralock™ connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Faucet designed for handle to be mounted on right side only

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge

STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- **ADA**  for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

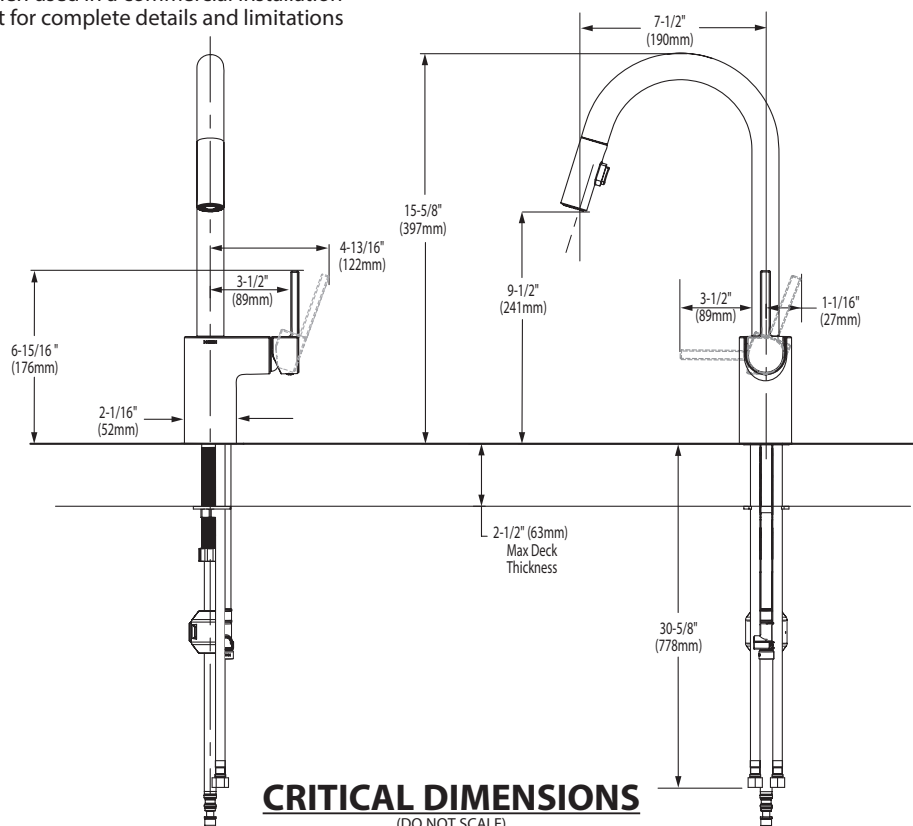

Specifications

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Power Clean™ spray technology
- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Faucet designed for handle to be mounted on right side only

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge

STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- **ADA**  for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

Visit www.moen.com/support for complete details and limitations

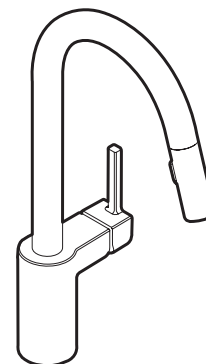


ALIGN™

Single Handle High Arc Pulldown Kitchen Faucet

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)

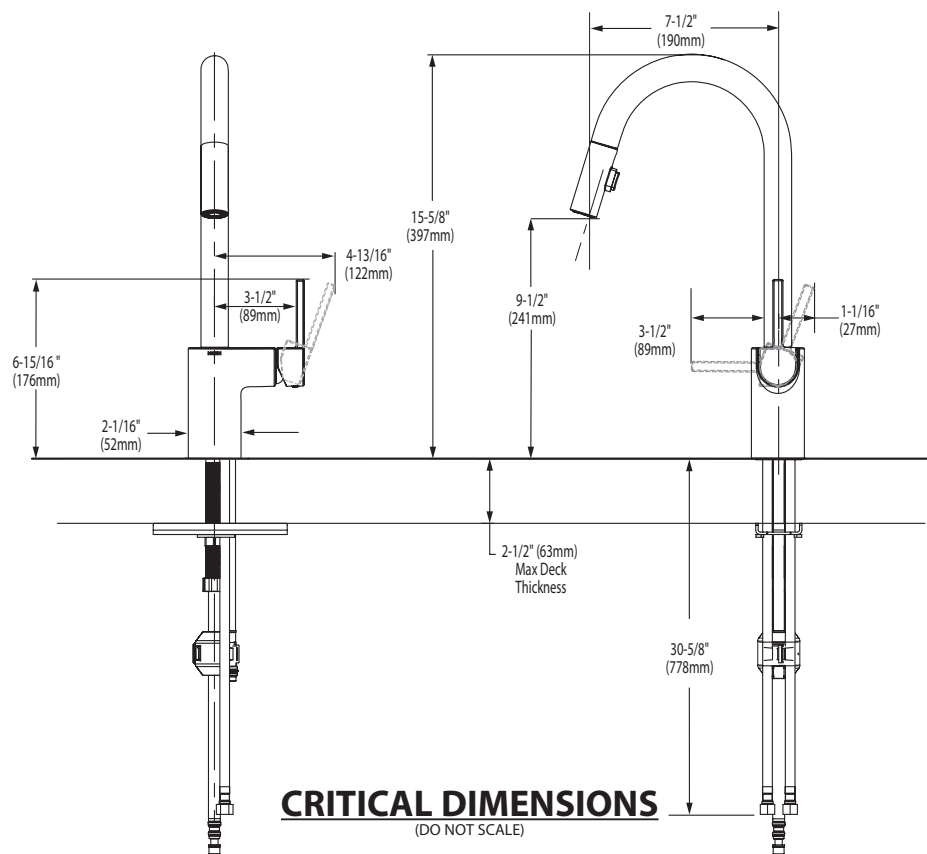

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com