



ACCESORIOS Y ACABADOS®

5-AA-CST244EF#01/SS114#01

Modelo: Entrada™ Sanitario de dos piezas.

FUNCIONES

- Alta eficiencia 1.28GPF/4.8LPF
- Tecnología de descarga de alto rendimiento E-Max®
- Altura universal 41 cm
- Cumple con ADA
- Compatible con WASHLET®
- Incluye asiento caída Suave
- Incluye palanca cromada

ESPECIFICACIONES PARA COLOMBIA

- Desagüe a 30,5 cm de pared terminada
- Se requiere: Kit Brida 40-AA-PB004.
No Incluido.

COMPONENTES

- C244EF Taza Entrada™
- ST243E Tanque Entrada™
- SS114#01 Asiento caída Suave

COLORES/ACABADOS

- #01
Algodón

ESPECIFICACIÓN DEL PRODUCTO

Sanitario de dos piezas con sistema de lavado E-Max, altura universal, alta eficiencia de 1,28GPF, tanque de alto perfil, taza alargada y palanca cromada. cumple con ADA.



CODES/STANDARDS

- Cumple ASME A112.19.2/CSA B45.1
- Certificaciones: IAPMO(CUPC)
- Cumplimiento del código: UPC, IPC, NSPC, NPC Canadá y otros
- Cumple con ADA (Manija instalada para fácil accionamiento)
- Cumple con los requisitos de advertencia de CA Prop 65





ACCESORIOS Y ACABADOS®

5-AA-CST244EF#01/SS114#01

Modelo: Entrada™ Sanitario de dos piezas.


ESPECIFICACIONES GENERALES

Uso del agua	1.28 GPF (4.8 LPF)
Sistema de lavado	E-Max. Sistema silencioso, diámetro 3" válvula de salida
Presión mínima del agua	8 psi (flujo)
Superficie de agua	8-3/8" x 10-1/2"
Diámetro de la trampa	2-1/8"
Desagüe a pared	30,5 cm
Sello de trampa	2-3/8"
Garantía	Garantía limitada de dos años por daño interno de fabricación
Material	Porcelana Vitrificada
Peso de envío	C244EF - 53lbs ST243E(R) - 24lbs
Dimensiones de envío	C244EF - 28-1/2" x 16" W1 x 10-1/4" W2 x 17-3/4" ST243E(R) - 16-1/2" x 8-1/4" x 15-3/4"


RECOMENDACIONES DE INSTALACIÓN

INSTALACIÓN ENFRENTADA

TOTO recomienda para instalaciones enfrentadas en construcciones verticales el uso del accesorio de la imagen 1.

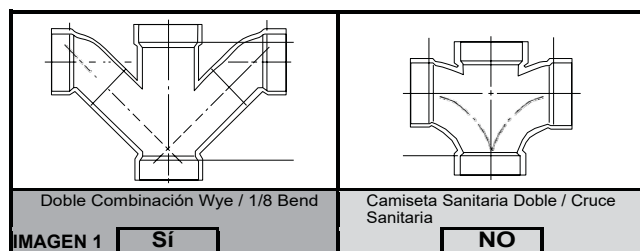

Para mantener un espacio de pared adecuado entre la parte posterior del tanque y la pared, instale la brida a una longitud nominal de 30,5 cm (distancia del desagüe).

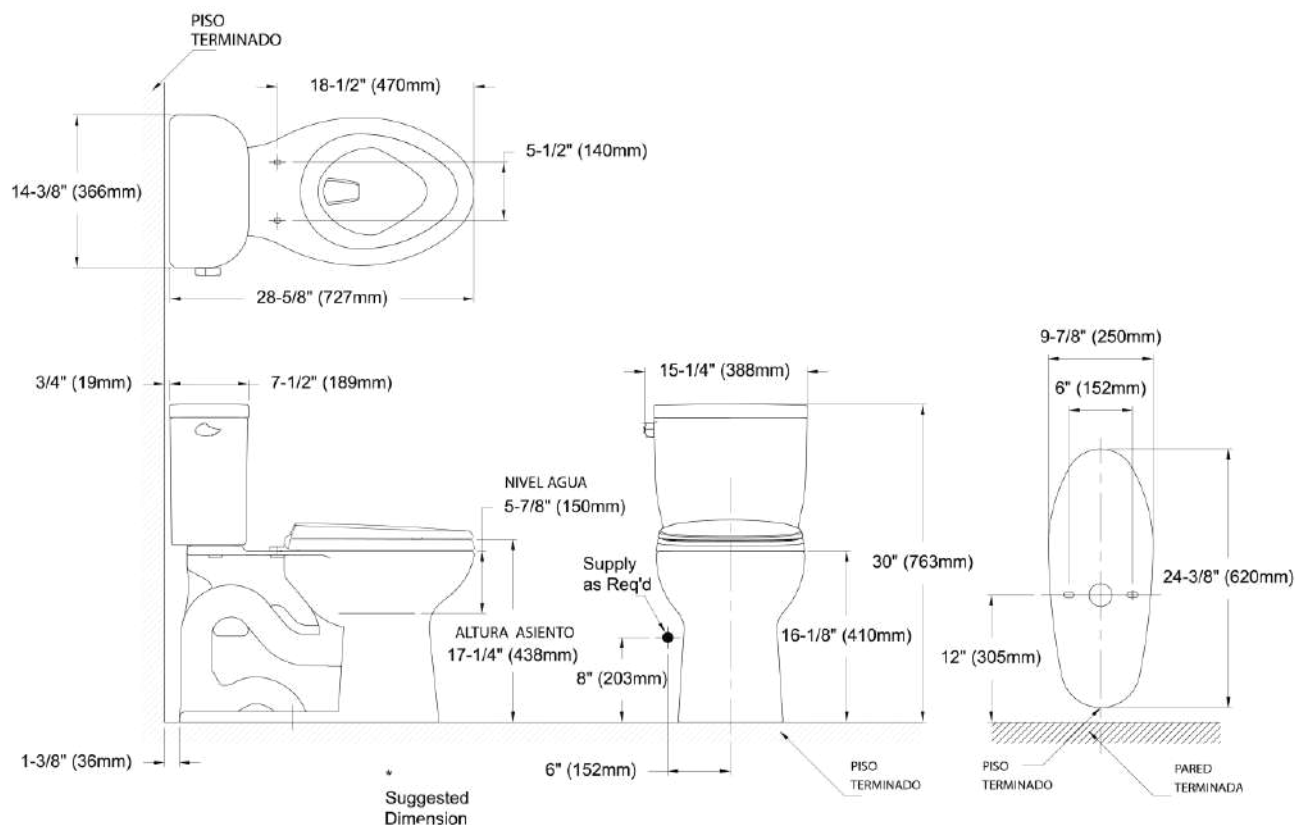**TOTO®**

Estas dimensiones y especificaciones están sujetas a cambios sin previo

Tenga en cuenta la ficha original de la fábrica en inglés



CST244EF(R)

Entrada™ Close Coupled Toilet, 1.28GPF

FEATURES

- E-Max® flushing system, high efficiency (1.28GPF/4.8LPP)
- Elongated bowl
- Universal Height
- ADA compliant
- Close coupled, elongated front bowl and tank set, seat sold separately
- Chrome trip lever
- 12" Rough-in

MODELS

- CST244EF
- CST244EFR - Right-hand trip lever

COMPONENTS

- C244EF - Elongated Front Bowl
- ST243E - Tank and cover only - Left hand trip lever (shown in photo)
- ST243ER - Tank and cover only - Right hand trip lever
- SS114 SoftClose® seat (sold separately)

COLORS/FINISHES

- Standard
#01 Cotton

PRODUCT SPECIFICATION

The two-piece, universal height, high efficiency E-Max flushing system toilet shall be 1.28GPF. Toilet shall have high-profile tank, elongated bowl and chrome trip lever. Toilet shall be ADA compliant and universal height. Toilet shall be **TOTO Model CST244EF**__.



E+ E-Max

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC)
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



CST244EF(R)

Entrada™ Close Coupled Toilet, 1.28GPF


SPECIFICATIONS

- Water Use 1.28 GPF (4.8 LPF)
- Flush System E-Max
- Min. Water Pressure 8 psi (flowing)
- Water Surface 8-3/8" x 10-1/2"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight **C244EF** - 53lbs
ST243E(R) - 24lbs
- Shipping Dimensions **C244EF** - 28-1/2" x 16" W1
x 10-1/4" W2 x 17-3/4"
ST243E(R) - 16-1/2" x 8-1/4"
x 15-3/4"


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

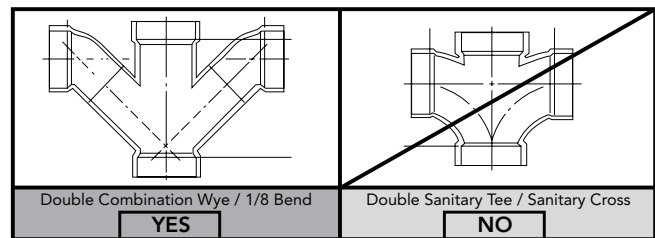

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

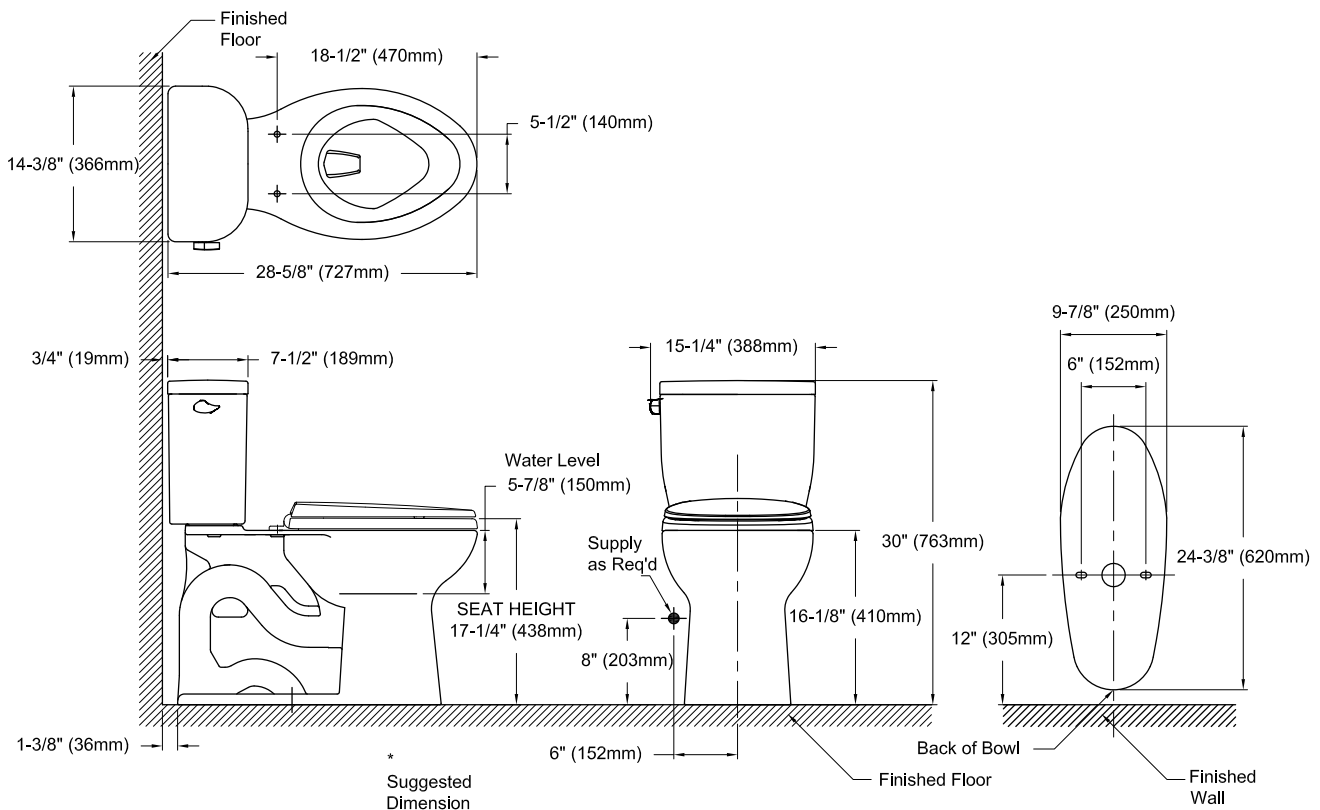

TOTO

These dimensions and specifications are subject to change without notice