

Modelo: Aquia® IV 1G® Sanitario de una pieza

FUNCIONES

- Ultra eficiencia, doble descarga 1.0 y 0.8 GPF (3.8 y 3.0 LPF)
- Sistema DYNAMAX™ TORNADO FLUSH® limpieza de 360°
- CEFIONTECT® El esmalte cerámico evita que la suciedad y el moho se adhieran a la cerámica
- Especialmente diseñado para WASHLET®+
- Diseño discreto y silencioso
- Incluye asiento caída suave
- Altura universal 41 cm

ESPECIFICACIONES PARA COLOMBIA

- Desagüe a pared 30,5 cm pared terminada
- Se requiere Kit Brida 40-AA-PB004. No incluido



DYNAMAX TORNADO FLUSH



DISEÑO DE FALDON



CEFIONTECT



ALTURA UNIVERSAL

COMPONENTES

- SS124#01 Asiento caída suave SoftClose®

COLORES/ACABADOS

- #01 Algodón

ESPECIFICACIÓN DEL PRODUCTO

Sanitario de una pieza con sistema DYNAMAX™ TORNADO FLUSH®. Altura universal. Ultra eficiencia, doble descarga 1.0 GPF/0.8 GPF. Esmalte cerámico CEFIONTECT. Incluye asiento caída suave.

CODES/STANDARDS

- Cumple ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certificaciones: IAPMO(CUPC®), EPA WaterSense, Estado de Massachusetts, y otros
- Cumplimiento de código: UPC, IPC, NSPC, NPC Canadá y otros
- Cumplimiento Legislativo: Código de Construcción Verde de California, Ordenanza de Eficiencia Del Agua de la Ciudad de Los Ángeles, y otros.
- Cumple con los requisitos de advertencia de CA Prop 65



Modelo: Aquia® IV 1G® Sanitario de una pieza


ESPECIFICACIONES GENERALES

Uso del agua	1.0 y 0.8 GPF (3.8 y 3.0 LPF)
Sistema de lavado	DYNAMAX™ TORNADO FLUSH®
Presión mínima de agua	8 psi (Flujo)
Superficie de agua	5-5/8" x 4-1/8"
Diámetro de la trampa	2-1/2"
Desagüe a pared	30,5 cm
Sello de trampa	2-1/8"
Garantía	Garantía limitada de dos años por daño interno de fabricación
Material	Porcelana vitrificada
Peso del envío	122 libras
Dimensiones de envío	32"L x 20"W x 17-3/4" H ¹ x 28-3/4" H ²

RECOMENDACIONES DE INSTALACIÓN


INSTALACIÓN ENFRENTADA

TOTO recomienda para instalaciones enfrentadas en construcciones verticales el uso del accesorio de la imagen 1

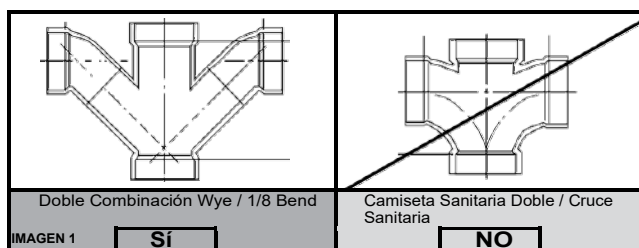

Para mantener un espacio de pared adecuado entre la parte posterior del tanque y la pared, instale la brida a una longitud nominal de 30,5 cm (distancia del desagüe). Los inodoros de alta eficiencia requieren un sistema de flujos suplementarios adecuados, para ello es importante utilizar tubería de 4" con una pendiente del 2% y su descarga final no exceda los 20 metros.

DIMENSIONES

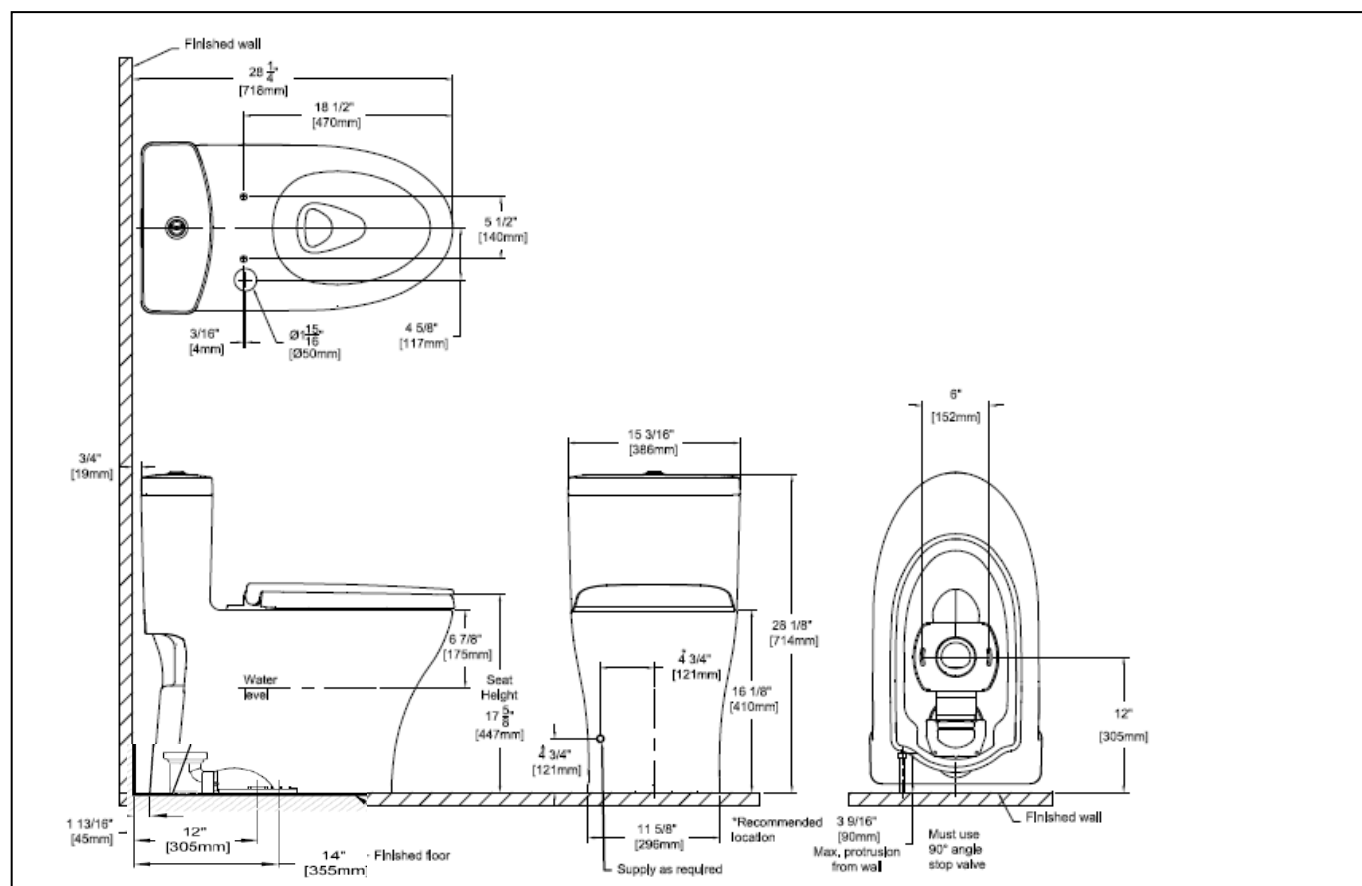**TOTO®**

Estas dimensiones y especificaciones están sujetas a cambios sin previo aviso

Tenga en cuenta la ficha original de la fábrica en Inglés

TOTO®

MS646124CUMFG(A)

Aquia® IV 1G® One-Piece Toilet, 1.0 & 0.8 GPF

FEATURES

- DYNAMAX™ TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.0 & 0.8 GPF (3.8 & 3.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- Completely skirted design for a sleek and understated look that's easier to clean
- Specially designed to accommodate a WASHLET®+
- Elongated front bowl toilet and seat set
- Universal Height
- Chrome push-button
- 12" Rough-in

MODELS

- **MS646124CUMFGA** (#01, #12, #03, #11)
With CEFIONTECT ceramic glaze and Auto Flush, includes seat SS124
- **MS646124CUMFG** (#01, #12, #03, #11)
Same as above but without Auto Flush
- **MS646124CUMF** (#51)
Without CEFIONTECT ceramic glaze & includes seat SS124

COMPONENTS

- **SS124**
SoftClose® Seat

Optional Components

- **SS234**
Slim Elongated SoftClose Seat
- **TSU08W.10**
10" Unifit Rough-In
- **TSU08W.14**
14" Unifit Rough-In
- **THU736#01-A**
Push Button Assembly - Cotton
- **THU736#PN-A**
Push Button Assembly - Polished Nickel
- **THU736#BN-A**
Push Button Assembly - Brushed Nickel

COLORS/FINISHES

- | | |
|---|---|
| <ul style="list-style-type: none">• #01 Cotton• #12 Sedona Beige | Made to Order <ul style="list-style-type: none">• #03 Bone• #11 Colonial White• #51 Ebony
(Without CEFIONTECT) |
|---|---|



 **DYNAMAX
TORNADO FLUSH**

 **Skirted Design**

 **CEFIONTECT**

 **Universal Height**

PRODUCT SPECIFICATION

The one-piece, ultra high-efficiency, DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.0 GPF/0.8 GPF. Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, universal height, complete skirted bowl and chrome push-button. Toilet shall be TOTO Model MS646124CUMF(G)_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



MS646124CUMFG(A)


Aquia® IV 1G® One-Piece Toilet, 1.0 & 0.8 GPF

SPECIFICATIONS

Water Use	1.0 & 0.8 GPF (3.8 & 3.0 LPF)
Flush System	DYNAMAX™ TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	5-5/8" x 4-1/8"
Trap Diameter	2-1/2"
Rough-in	12" (10" & 14" Optional)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	122 lbs
Shipping Dimensions	32" L x 20" W x 17-3/4" H¹ x 28-3/4" H²

INSTALLATION NOTES


Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

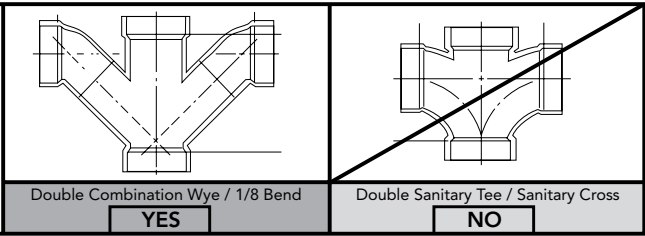

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft.

DIMENSIONS

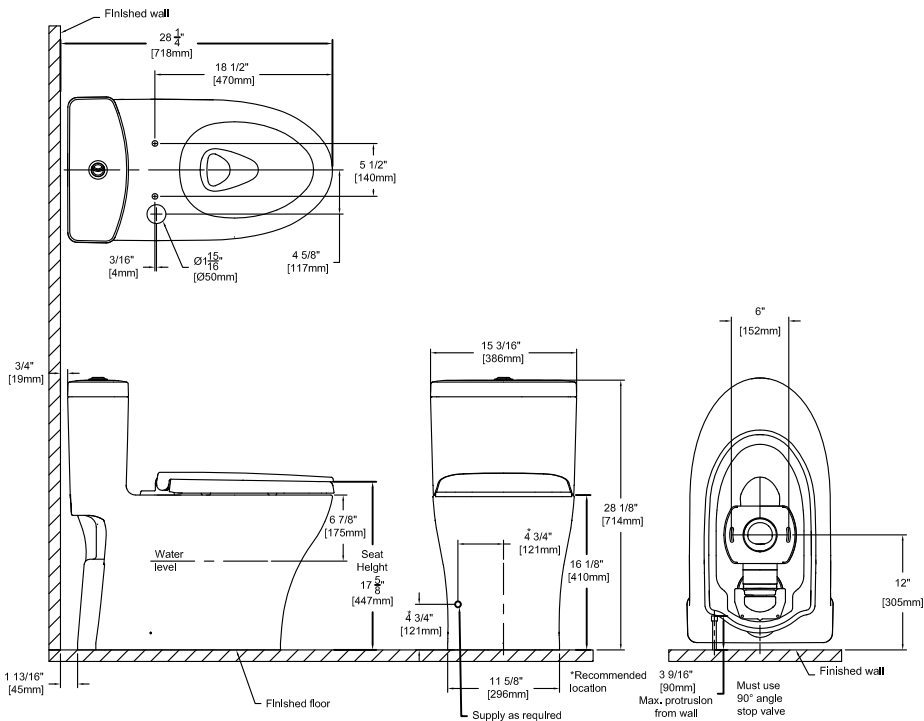

TOTO®

These dimensions and specifications are subject to change without notice