

FUNCIONES


- Suave aireado, agua tibia, spray de doble acción con características oscilante y pulsante
- Temperatura y volumen ajustables del agua
- Sistema de calentamiento de agua instantáneo y ahorro de energía
- Secado de aire cálido con cinco ajustes de temperatura variables
- Desodorizado automático de aire
- Control inalámbrico delgado de panel táctil iluminado
- Memoria para dos usuarios de configuración
- Estación de acoplamiento para facilitar la limpieza e instalación
- Asiento con control de temperatura
- EWATER+ limpia automáticamente la varita y la taza sanitaria
- Función Ewater+ en el control remoto.
- Aspersión de agua antes de cada uso

COLORES/ACABADOS

- #01 Algodón

ESPECIFICACIÓN DEL PRODUCTO

El Washlet S500e con tecnología EWATER+ de agua suave, tibia, aireada y pulverización de doble acción. Cuenta con movimiento oscilatorio y función de masaje. Temperatura y un volumen ajustable del agua, aire caliente con cinco ajustes de temperatura variables. Desodorizador automático. Incluye control inalámbrico delgado con panel táctil iluminado, cable de alimentación y mangueras de suministro de agua

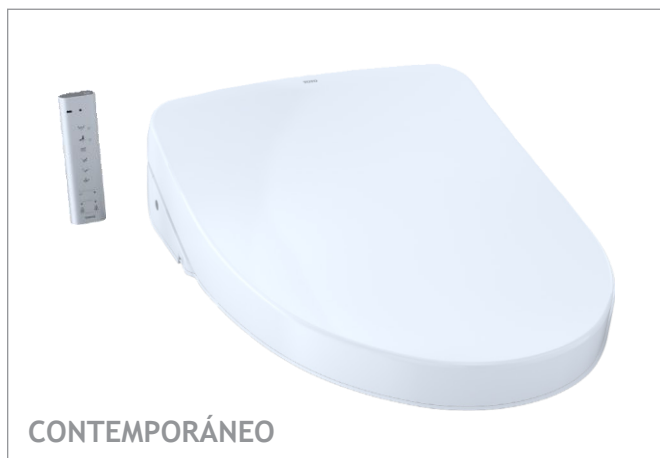

WASHLET



EWATER+



Pre-Mist

CÓDIGOS/NORMAS

- Cumple ASME A112.4.2, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 #68
- Certificaciones: IAPMO(CUPC), Estado de Massachusetts, Ciudad de Los Ángeles y otros
- Cumple código: UPC, IPC, NSPC, NPC Canadá y otros
- Cumple con los requisitos de advertencia de CA Prop 65



WASHLET S500e

CARACTERÍSTICAS TÉCNICAS


Potencia nominal	AC 120 V 60 Hz
Consumo de energía	1288 W
Consumo máximo de energía	1444 W
Longitud del cable de alimentación	1,2 m (3,94 pies)
Volumen de pulverización	Limpieza posterior: 0,08 - 0,11 gal/min Limpieza suave posterior: 0,08 - 0,11 gal/min Limpieza frontal: 0,08 - 0,11 gal/min Limpieza frontal amplia: 0,08 - 0,11 gal/min
Características del spray	Temperatura de superficie ajustable: 86 - 104 °F (30 - 40 °C) Dispositivo de seguridad: fusible de temperatura
Características del secado calido	Aire ajustable Temp: 95 - 140 °F (35 - 60 °C) Volumen de flujo de aire: 0,29 m3/min (10,24 ft3/min) Dispositivo de seguridad: fusible de temperatura
Características del asiento con calefacción	Temperatura de superficie ajustable: 82 - 97 °F (28 - 36 °C) Dispositivo de seguridad: fusible de temperatura
Presión de suministro de agua	Mínimo: 7.25 PSI (Dinámico) Máximo: 108.75 PSI (estático)
Temperatura ambiente.	32 - 104 °F (0 - 40 °C)
Garantía	Garantía limitada de un año
Peso del envío	SW3046: 15.0 libras SW3044: 15.2 libras
Dimensiones de envío	SW3046 y SW3044: 23-1/2"W x 18-1/2"W x 6-1/2"H

NOTAS DE INSTALACIÓN

- WASHLET S500E puede no adaptarse a ciertos diseños de inodoros.
- Se recomienda utilizar un protector contra sobretensiones para evitar daños en caso de un aumento de potencia. TOMA TIPO GFCI
- Para uso con agua potable solamente. No utilizar con agua reciclada.
- Advertencia: Consumo de energía nominal 1288W

DIMENSIONES

SW3046 (Contemporáneo)

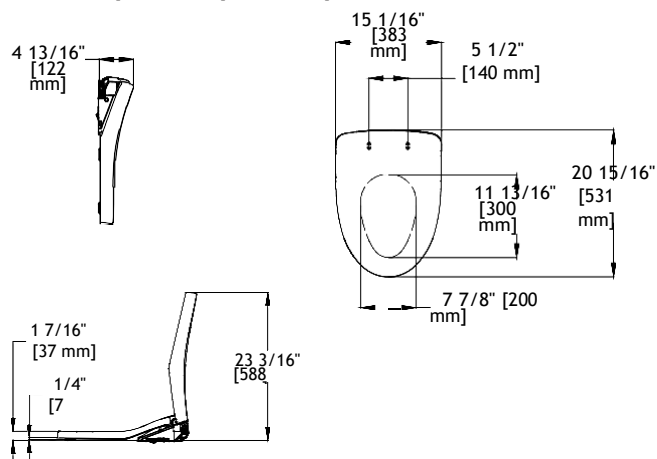

FEATURES

- Gentle Aerated, Warm Water, Dual Action Spray with oscillating and pulsating feature
- Adjustable water temperature and volume
- Instant water heating system for continuous warm water and energy saving
- Warm air drying with five variable temperature settings
- Automatic air deodorizer
- Convenient slim wireless remote, with illuminated touch pad
- 2 saved user settings
- Docking station for easy cleaning and installation
- Heated Seat with Temperature Control
- EWATER+ auto-cleans wand and bowl
- On-demand remote function cleans wand with ewater+
- Water pre-mist of bowl before each use

MODELS


- SW3046 - Contemporary Design
- SW3044 - Classic Design

COLORS/FINISHES

- #01 Cotton
- #12 Sedona Beige

PRODUCT SPECIFICATION

Seat shall have gentle aerated, warm water, dual action spray with cycling movement and massage feature. Seat shall have adjustable water temperature and volume. Seat shall have warm air drying with five variable temperature settings. Seat shall have automatic air deodorizer. Seat shall include wireless remote control. Seat shall be solid plastic with closed front seat and cover. Seat shall include power cord, and water supply hoses. eWater+ cleans the bowl and wand. Seat shall be model # SW3046 or SW3044_____

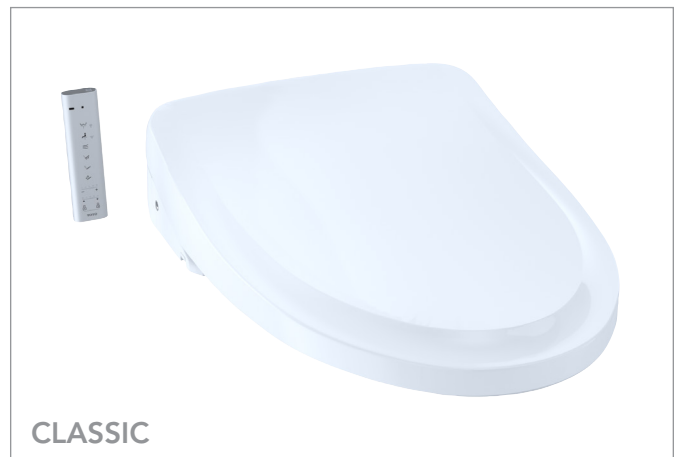

WASHLET



EWATER+



Pre-Mist

CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 #68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



SPECIFICATIONS


Power Rating	AC 120 V 60 Hz
Power Consumption	1288W
Max Power Consumption	1444W
Power Cord Length	3.94 ft (1.2 m)
Spray Volume	Rear Cleansing: 0.08 – 0.11 gal/min Rear Soft Cleansing: 0.08 – 0.11 gal/min Front Cleansing: 0.08 – 0.11 gal/min Wide Front Cleansing: 0.08 – 0.11 gal/min
Spray Features	Adjustable Surface Temp: 86 – 104 °F (30 – 40 °C) Safety Device: Temperature Fuse
Warm Air Dryer Features	Adjustable Air Temp: 95 – 140 °F (35 – 60 °C) Airflow Volume: 10.24 ft ³ /min (0.29 m ³ /min) Safety Device: Temperature Fuse
Heated Seat Features	Adjustable Surface Temp: 82 – 97 °F (28 – 36 °C) Safety Device: Temperature Fuse
Water Supply Pressure	Minimum: 7.25 PSI (Dynamic) Maximum: 108.75 PSI (Static)
Ambient Temp.	32 – 104 °F (0 – 40 °C)
Warranty	One Year Limited Warranty
Shipping Weight	SW3046: 15.0 lbs SW3044: 15.2 lbs
Shipping Dimensions	SW3046 & SW3044: 23-1/2" L x 18-1/2" W x 6-1/2" H

INSTALLATION NOTES

- WASHLET S500e may not fit certain toilet bowl designs
- If possible, with your order, please include your model number (from the underside of the tank lid).
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge.
- For use with potable water only. Do not use with recycled water.
- Warning: Rated power consumption 1288W

DIMENSIONS

SW3046 (Contemporary)

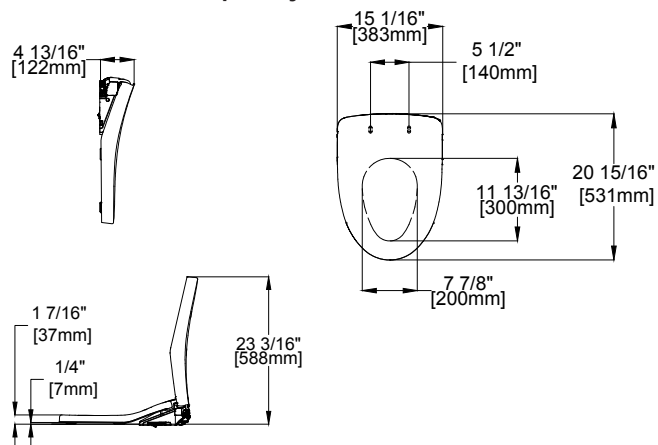

SW3044 (Classic)

