



ACCESORIOS Y ACABADOS®

5-AA-TBV02406U#CP/TBN01001U

Mezclador cuadrado termostático con pulsador entre duchas

FUNCIONES

- Asistencia de giro.
- Pulsador para cambiar fácilmente entre funciones
- Trim de control de temperatura anti-quemadura
- Válvula de mezcla termostática de Safety Thermo™ (SMA) certificada por ASSE
- Incluye válvula y MiniUnit™ (TBN01001U)
-

COLORES/ACABADOS

- #CP cromado pulido

ESPECIFICACIÓN DEL PRODUCTO

Mezclador cuadrado termostático con desviador bidireccional, incluye válvula de control de temperatura anti-quemaduras



SAFETY THERMO™ (SMA)

CÓDIGOS/NORMAS

- Cumple ASSE 1016/ASME A112.1016/ CSA B125.16, ASME A112.18.1/CSA B125.1
- Certificaciones: IAPMO (CUPC), Estado de Massachusetts, Ciudad de Los Ángeles, y otros
- Cumple código: UPC, IPC, NSPC, NPC Canadá y otros
- Cumple con los requisitos de advertencia de ca Prop 65






ACCESORIOS Y ACABADOS®

5-AA-TBV02406U#CP/TBN01001U

Mezclador cuadrado termostático con pulsador entre duchas



ESPECIFICACIONES

Material	Latón
Garantía	Garantía limitada de dos años por daños internos de fabricación
Peso del envío	5.6 lbs
Dimensiones de envío	9-1/4" x 7-5/8" x 6"

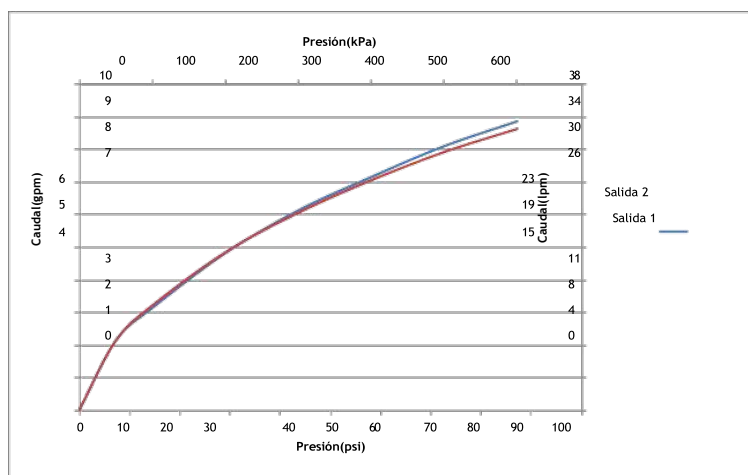

DIMENSIONES

Pared terminada

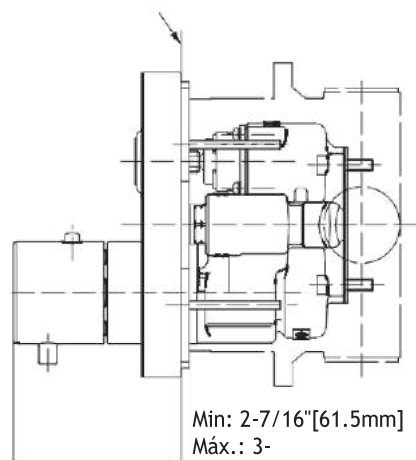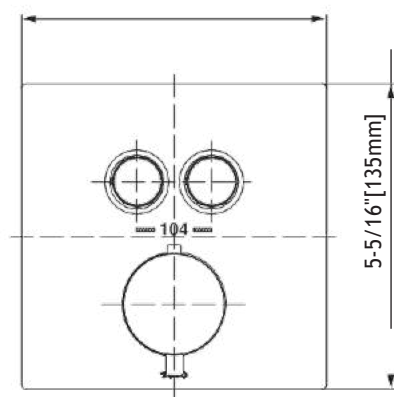

TOTO®

Estas dimensiones y especificaciones están sujetas a cambios sin previo aviso

TENER EN CUENTA LA FICHA TÉCNICA DE LA FÁBRICA EN INGLÉS

Thermostatic Mixing Valve 2-Function Trim

FEATURES

- For use with MiniUnit™ (TBN01001U)
- Temperature control trim with anti-scald safety stop
- Unobtrusive twist assist for a clean aesthetic
- ASSE certified Safety Thermo™ (SMA) Thermostatic Mixing Valve
- Push button to easily switch between showers

COLORS/FINISHES

- #CP Polished Chrome
- #PN Polished Nickel
- #BN Brushed Nickel

OPTIONAL ACCESSORY

- **THP5466#(CP, PN, BN)**
Thermostatic Mixing Valve ADA Handle -
Polished Chrome, Polished Nickel, Brushed Nickel

PRODUCT SPECIFICATION

Pressure balance valve trim shall have a lever handle. Product shall be TOTO Model TBV02406U#____. Product shall require TBN01001U MiniUnit (sold separately). Product shall be a temperature control valve and trim with anti-scald safety stop. Product shall be ASSE certified. Not intended for use in new construction or permitted remodel where compliance to the CALGreen Code is necessary.



Safety Thermo™ (SMA)

CODES/STANDARDS

- Meets or exceeds ASSE 1016/ASME A112.1016/CSA B125.16, ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



TBV02406U


Thermostatic Mixing Valve 2-Function Trim

SPECIFICATIONS


Material	Brass
Warranty	Limited Lifetime (Residential Use) One Year (Commercial Use)
Shipping Weight	5.6 lbs
Shipping Dimensions	9-1/4" x 7-5/8" x 6"

INSTALLATION NOTES


Requires TBN01001U MiniUnit (sold separately).

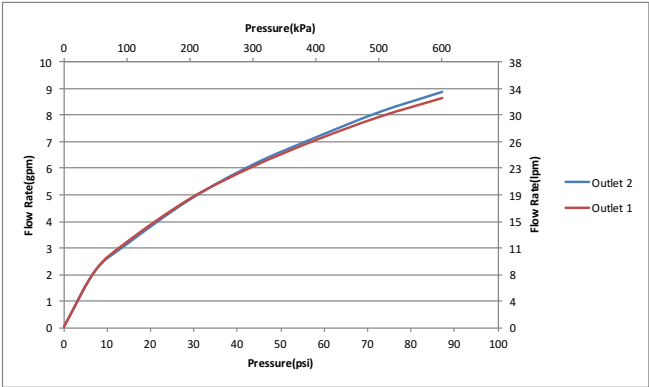

DIMENSIONS

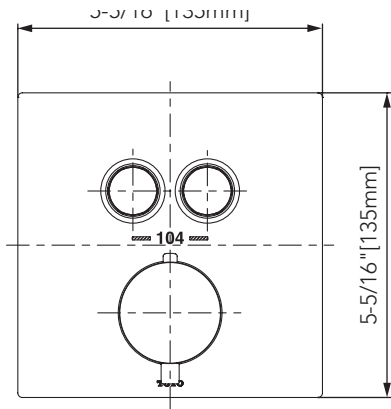

shed wall surface /
superficie de la pared acabada /
face de muf finie /
superficie de parede acabada

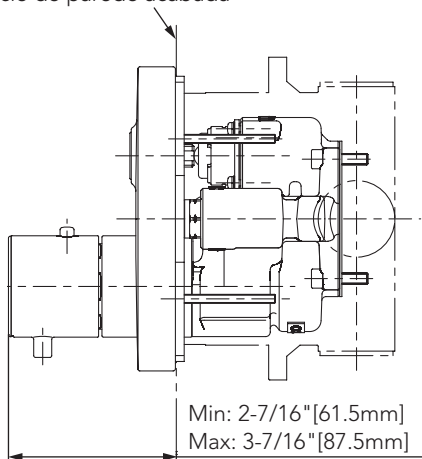

TOTO®

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

These dimensions and specifications are subject to change without notice

#SS-01308 v.02