

Grifería lavamanos monocontrol, grifo bajo. Modelo GS

FUNCIONES

- Tecnología WaterSense® consumo 1,2 GPM
- Tecnología Comfort Glide™ Control de mango suave
- Incluye cartucho de cerámica recubierto de carbono tipo diamante (DLC) para una durabilidad máxima
- Incluye desagüe Pop-up
- Cumple ADA

COLORES/ACABADOS

- #CP Cromo pulido



COMFORT GLIDE

ESPECIFICACIÓN DEL PRODUCTO

Grifería lavamanos monocontrol, grifo bajo. Modelo GS consumo de 1,2 GPM (4,5 LPM). Incluye cartuchos de válvula de disco cerámico y desagüe Pop-up

CODES/STANDARDS

- Cumple ASME A112.18.1/CSA B125.1, NSF 61-9, NSF 372
- Certificaciones: IAPMO (CUPC), EPA WaterSense, Estado de Massachusetts y otros
- Cumplimiento de código: UPC, IPC, NSPC, CEC, DOE, NPC Canadá y otros
- Código de Construcción Verde de California, Ordenanza de Eficiencia Hídrica de la Ciudad de Los Ángeles
- Cumple con los requisitos federales y estatales como sin plomo (promedio ponderado de 0.25% de plomo o menos)
- Cumple con ADA
- Cumple con los requisitos de advertencia de CA Prop 65






ACCESORIOS Y ACABADOS®

5-AA-TLG03301U#CP


Grifería lavamanos monocontrol, grifo bajo. Modelo GS

ESPECIFICACIONES

Material	Latón
Caudal máximo	1.2 GPM (4.5 LPM)
Garantía	Garantía limitada de dos años por daño interno de fabricación
Dimensiones de envío	23-1/4" x 9" x 3-1/2"
Peso del envío	5.7 lbs

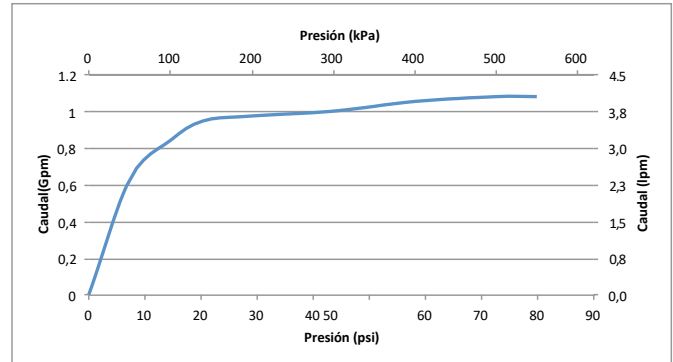

DIMENSIONES

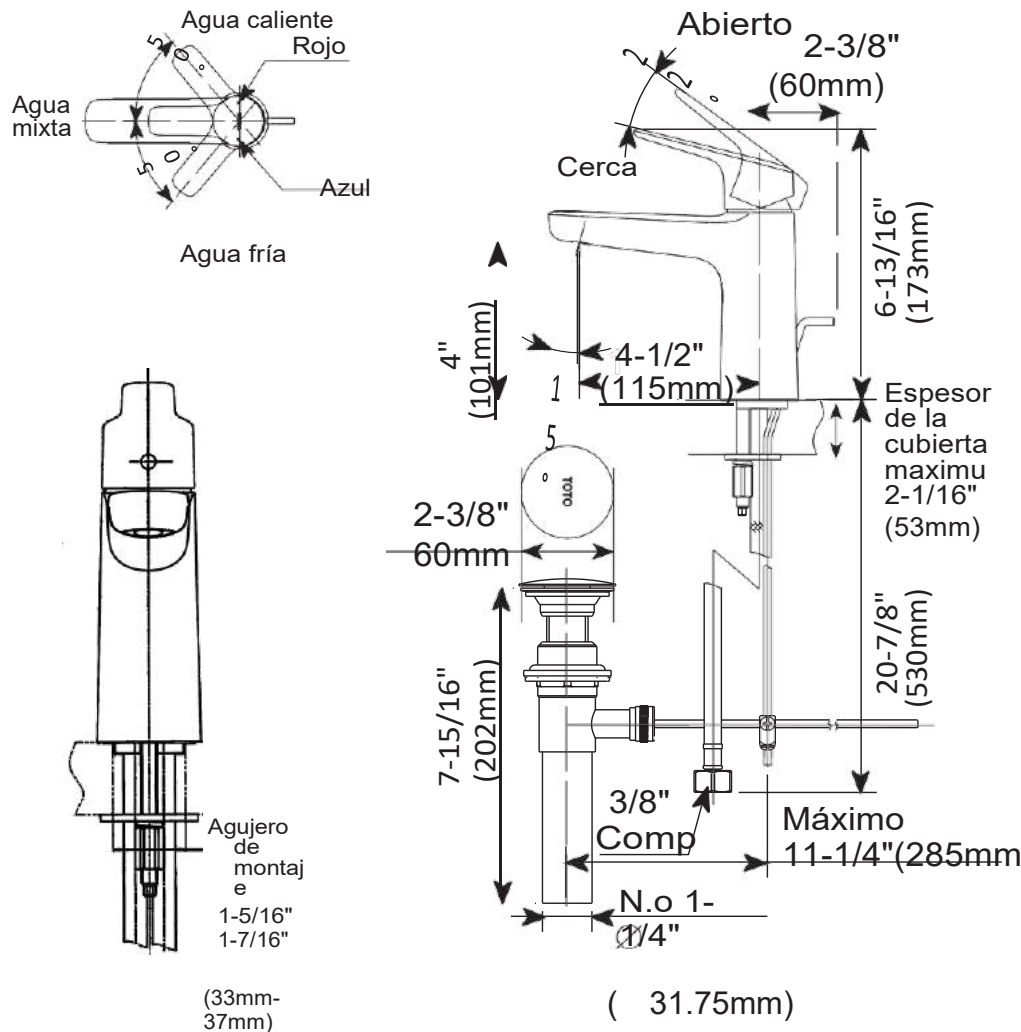

TOTO®

Estas dimensiones y especificaciones están sujetas a cambios sin previo aviso

Tenga en cuenta la ficha original de la fábrica en Inglés

GS Single-Handle Faucet

FEATURES

- WaterSense® certified low-flow 1.2 gpm faucet
- Smooth handle control with Comfort Glide™ technology
- Diamond-Like Carbon (DLC) coated ceramic cartridge for ultimate durability
- Brass construction
- Lever handle
- Metal pop-up drain assembly included

COLORS/FINISHES

- #CP Polished Chrome
- #PN Polished Nickel
- #BN Brushed Nickel

Made to Order

- #PFG Polished French Gold
- #PBR Polished Bronze

OPTIONAL ACCESSORIES

- THP3158#\$\$ – 4" Cover Plate
- THP3159#\$\$ – 8" Cover Plate

PRODUCT SPECIFICATION

Product shall have a maximum flow rate of 1.2 gpm (4.5 lpm). Product shall have a brass construction. Product shall have a lever handle. Product shall have a ceramic disk valve cartridges. Product shall include metal pop-up drain assembly. Product shall be TOTO Model TLG03301U#_____.



CODES/STANDARDS


- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9, NSF 372
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, CEC, DoE, NPC Canada, and others
- California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- Complies with federal and state requirements as lead-free (weighted average of 0.25% lead or less)
- ADA compliant
- Complies with CA Prop 65 warning requirements



SPECIFICATIONS

Material	Brass
Maximum Flow Rate	1.2 gpm (4.5 lpm)
Warranty	Lifetime Limited Warranty (Residential Use) One Year (Commercial Use)
Shipping Dimensions	23-1/4" x 9" x 3-1/2"
Shipping Weight	5.7 lbs

INSTALLATION NOTES

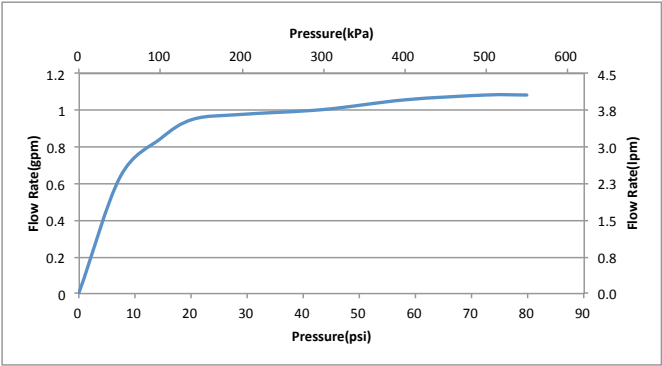

DIMENSIONS

