

5-AA-MS854114E#01/SS114#01

Modelo: UltraMax® Sanitario de una pieza.

FUNCIONES

- Alta eficiencia (1.28GPF/4.8LPF)
- Sistema E-Max®
- Sanitario de una pieza con tanque de alto perfil
- Incluye palanca cromada
- Incluye asiento caída suave Softclose®

ESPECIFICACIONES PARA COLOMBIA

- Desagüe a pared 30.5 cm pared terminada
- Se requiere kit brida 40-AA-PB004. No incluido

COLORES/ACABADOS

- #01
Algodón



E+ E-Max

CODES/STANDARDS

- Cumple ASME A112.19.2/CSA B45
- Certificaciones: IAPMO(CUPC), EPA Watersense, Estado de Massachusetts, Ciudad de Los Ángeles y otros
- Cumple código: UPC, IPC, NSPC, NPC Canadá y otros
- Cumple legislativo: California AB715, California Green Building Code, Eficiencia Hídrica de la Ciudad de Los Ángeles

ESPECIFICACIÓN DEL PRODUCTO

Sanitario de una pieza con sistema de lavado E-Max®. Alta eficiencia 1,28 GPF/4,8LPF. Incluye palanca cromada y asiento caída suave Softclose®.

5-AA-MS854114E#01/SS114#01

Modelo: UltraMax® Sanitario de una pieza.


ESPECIFICACIONES

Uso del agua	1.28 GPF/4.8 LPF
Sistema descarga	E-Max®
Presión mínima de agua	8 psi (estática)
Superficie del agua	10-1/4" x 8-1/4"
Diámetro de la trampa	2-1/8"
Desague a la pared	30.5 cm
Sello trampa	2-3/8"
Garantía	Garantía limitada de dos años por daño interno de fabricación
Peso del envío	93 lbs.
Dimensiones de envío	30-3/4" L x 18-1/8"W x 27-1/8" H


RECOMENDACIONES DE INSTALACIÓN

INSTALACIÓN ENFRENTADA

TOTO recomienda para instalaciones enfrentadas en construcciones verticales el uso del accesorio de la imagen 1.

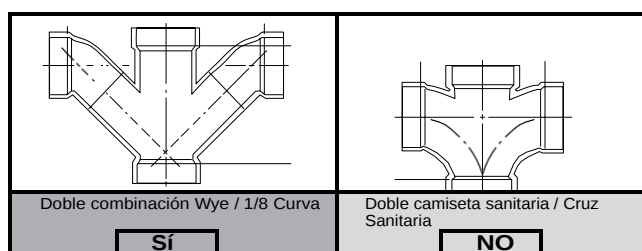

Para mantener un espacio de pared adecuado entre la parte posterior del tanque y la pared, instale la brida a una longitud nominal de 30,5 cm (distancia del desagüe).

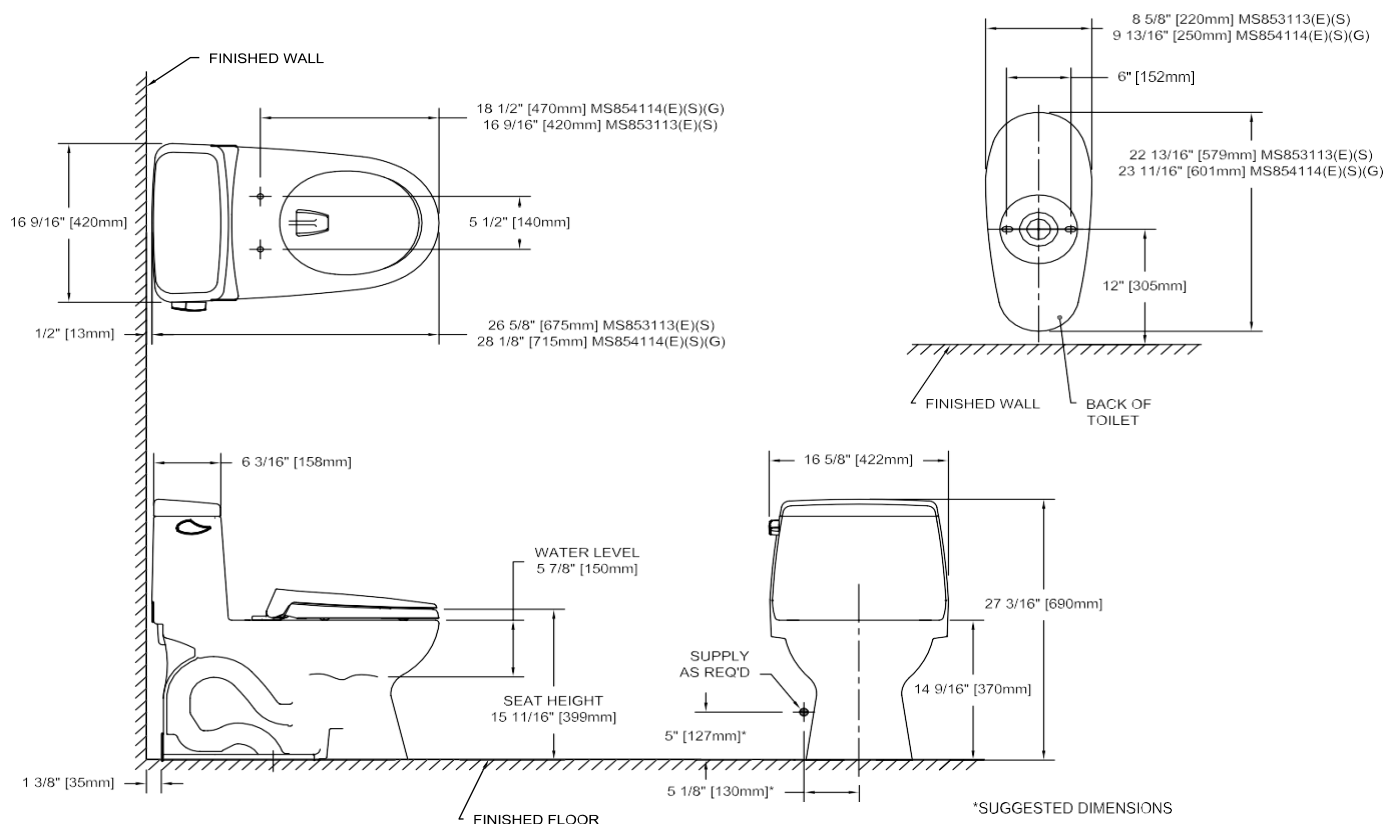

TOTO®

Estas dimensiones y especificaciones están sujetas a cambios sin previo aviso

Tenga en cuenta la ficha original de la fábrica en inglés

TOTO® MS854114E(G)/MS853113E

Eco UltraMax® One-Piece Toilet, 1.28GPF

FEATURES

- E-Max® flushing system, high efficiency (1.28GPF/4.8LPF)
- Optional CeFiONtect™ ceramic glaze - prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals.
- One-piece decorative toilet with high-profile tank
- Chrome trip lever
- Elongated front bowl with SoftClose® seat (SS114) or round front bowl with SoftClose seat (SS113)
- 12" Rough-in

MODELS

- MS854114EG
Elongated bowl with CeFiONtect and SoftClose seat (SS114)
- MS854114E
Elongated bowl with SoftClose seat (SS114)
- MS853113E
Round bowl with SoftClose seat (SS113)

COLORS/FINISHES

- Standard
 - #01 Cotton
 - #03 Bone
 - #11 Colonial White
 - #12 Sedona Beige

PRODUCT SPECIFICATION

The one-piece high efficiency E-Max flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall be of elongated front bowl (MS854) or round front bowl (MS853) with a high-profile tank and SoftClose seat. Toilet shall have optional CeFiONtect ceramic glaze. Toilet shall have chrome trip lever. Toilet shall be TOTO Model MS85_____.



 **CeFiONtect**

 **E-Max**

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance



MS854114E(G)/MS853113E

Eco UltraMax® One-Piece Toilet, 1.28GPF


SPECIFICATIONS

- Water Use 1.28 GPF/4.8 LPF
- Flush System E-Max®
- Min. Water Pressure 8 psi (static)
- Water Surface 10-1/4" x 8-1/4"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight MS854114E(G) 93 lbs.
MS853113E 91 lbs.
- Shipping Dimensions 30-3/4" L x 18-1/8" W
x 27-1/8" H


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

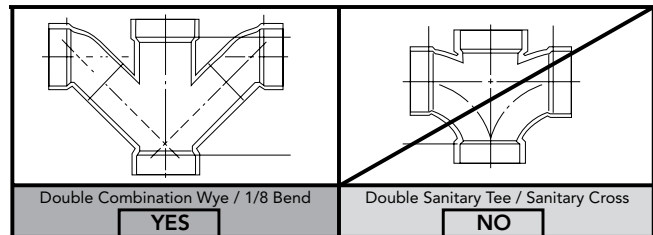

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

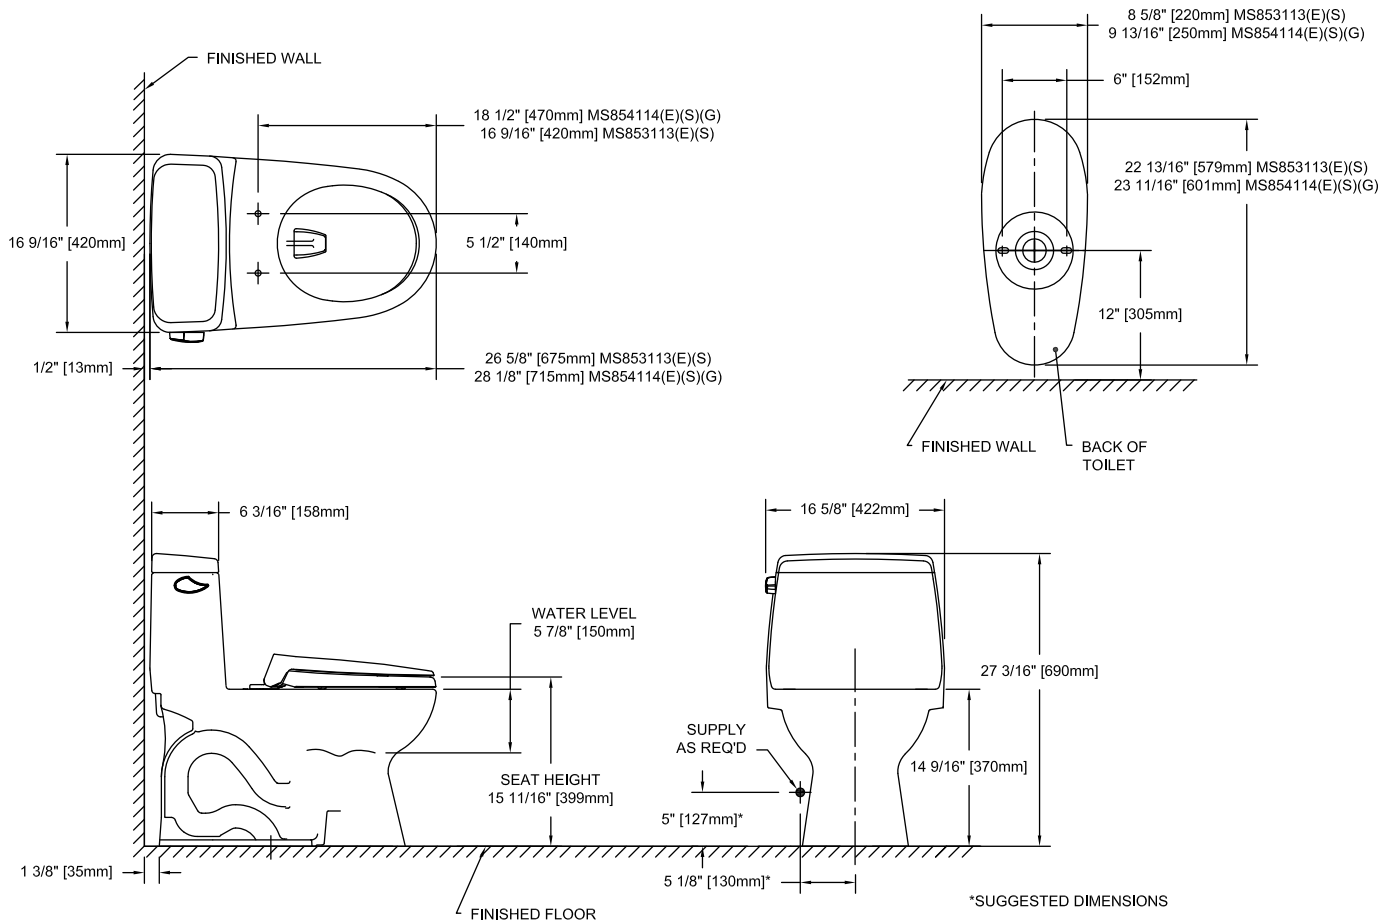

TOTO

These dimensions and specifications are subject to change without notice